
WEFL: WALL-E Floor Scale Series

DINI ARGEO
Scales - Weighing systems

As of: Monday, January 12, 2026

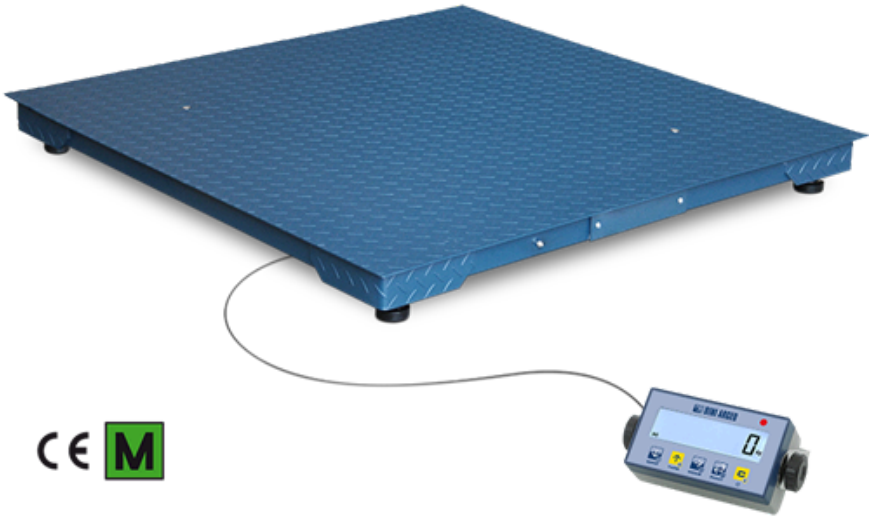

Standard Features

- Weight indicator with ABS case, 25mm backlit LCD display with 6 high contrast digits and icons for showing the active functions. 5-key functional waterproof keypad.
- Fitted with fixing bracket with adjustable inclination.
- Functioning with 4 steel load cells, approved according to OIML R60 C3 standards, IP67 protection degree.
- Junction box with IP67 protection rating.
- Monobloc structure with oven-fire painted steel tubular, adjustable resting feet, and level.
- Protection reinforcements close to the load cells.
- Fixed load surface in chequered steel, size: see the table.
- Digital calibration and Set-Up from keypad or from PC through DINITOOLS.
- Cable 3m long for the connection between platform and indicator.
- Supplied as standard with 4 AA batteries extractable drawer (batteries not included), and 12V external power adapter (if connected it excludes the battery supply). EU, UK, US, AU plugs included as standard.
- Fitted with high resolution calibration for internal use, with 0.03% accuracy of the maximum capacity (activated as standard and disabled by menu).

Floor scales characterized by a multifunction, compact weight indicator and a sturdy, monobloc, steel platform. Particularly suitable for industrial and commercial use, guaranteeing precision and reliability. Available also in CE-M approved version according to OIML R-76 / EN 45501 standards.

WEFL: WALL-E Floor Scale Series Specifications

Selectable Function Modes:

The user can select the operating modes directly using the dedicated key*:
- High resolution display x 10
- Precision weighing with temporary recalibration via a sample weight (for internal factory use)
- Net/Gross
- Lb to Kg converter
- Free conversion factor (for meter and litre counters etc.)
- Weight totalizer
- Formulizer
- +/- controller with quick target and threshold input
- Percentage weighing
- Piece counter
- Hold

The “alibi memory” function is available in combination with the required operating mode and it is activated automatically when installing the relevant optional board.

Optional Functions:
- PEAK, detection of weight peaks (code DFWPK)
- Newton to Kg converter (code DFWPK)

Accessing User Menu:
Use the dedicated key* to adjust the weighing filter, date and time, setpoint and tare weight, which the user can access by entering a programmable access password.

** These quick access keys to the menus can be blocked by configuring a dedicated password.*

Available Versions

Code	l x w x h (mm)	Nr. of cells	Max (kg)	d (kg)	M 2R (kg)*
WEFLB1500-2	1250x1250x120	4x1000kg	600/1500	0,2/0,5	0,2/0,5
WEFLD3000-2	1250x1500x120	4x2000kg	1500/3000	0,5/1	0,5/1
WEFLE3000-2	1500x1500x120	4x2000kg	1500/3000	0,5/1	0,5/1

(*) These divisions are obtainable only with the relative options.

Parts

Part #	Description
Available Versions	
WEFLB1500-2	Floor scale 1250x1250x120mm, Max=600/1500kg, d=0,2/0,5kg. Fitted with ABS weight indicator with backlit LCD display and 5-key keypad.
WEFLD3000-2	Floor scale 1250x1500x120mm, Max=1500/3000kg, d=0,5/1kg. Fitted with ABS weight indicator with backlit LCD display and 5-key keypad.
WEFLE3000-2	Floor scale 1500x1500x120mm, Max=1500/3000kg, d=0,5/1kg. Fitted with ABS weight indicator with backlit LCD display and 5-key keypad.

Options

Part #	Description
Legal for Trade Approval (only at time of order)	
ECEM2	Multi-range 3000+3000e legal for trade approval, for single platform/scale. NOTE: Depending on the product, the ECEM approval service may require DINICAL calibration service. Check to see if DINICAL is in the product options.
ECEMDOC	Printed EU declaration of conformity, EU certificate of verification, test certificate and metrological book (free download from our website, only for approved CE-M products). NET €.
Columns, Supports Brackets, Visors	
STFR-1	AISI 304 stainless steel fixing bracket with adjustable inclination. For weight indicator wall mounting.
CSP38	Stainless steel column 450x450mm, h=917, Ø 38mm. Painted steel base. For the indicators of the DINI ARGEO and SCALE HOUSE range.
CSP38D	Stainless steel column 350x350mm, h=750mm. Painted steel base. For the indicators of the DINI ARGEO and SCALE HOUSE range.
Frame for Flush Floor Installation	
FLATF-2	Frame for flush floor installation, for FLA / WEFLA scales.
FLMTF-1	Frame for flush floor installation, for FLM / WEFLM scales.
FLBTF-1	Frame for flush floor installation, for FLB / WEFLB scales.
FLDTF-1	Frame for flush floor installation, for FLD / WEFLD scales.
FLETF-1	Frame for flush floor installation, for FLE / WEFLE scales.
Calibration Service (Only at Order)	
CT6	ISO 17025 calibration certificate from 301 to 1500 kg for single scale/platform. For precision and industrial scales, crane scales. The certificate is provided in digital format (pdf) and sent by e-mail.
CT7	ISO 17025 calibration certificate from 1501 to 3000 kg for single scale/platform. For precision balances, industrial and crane scales. The certificate is provided in digital format (pdf) and sent by e-mail.
Connection Cables	
RSCBRJ10M	RS232/C serial cable - DB9/RJ11 - l=10m.
RSCBUSB-1	USB PC/RS232 converter cable, l=1,5m. USB/RJ11 connector.