
WEFLK: WALL-E Floor Scale Series with Integrated Printer

DINI ARGEO
Scales - Weighing systems

As of: Monday, January 12, 2026

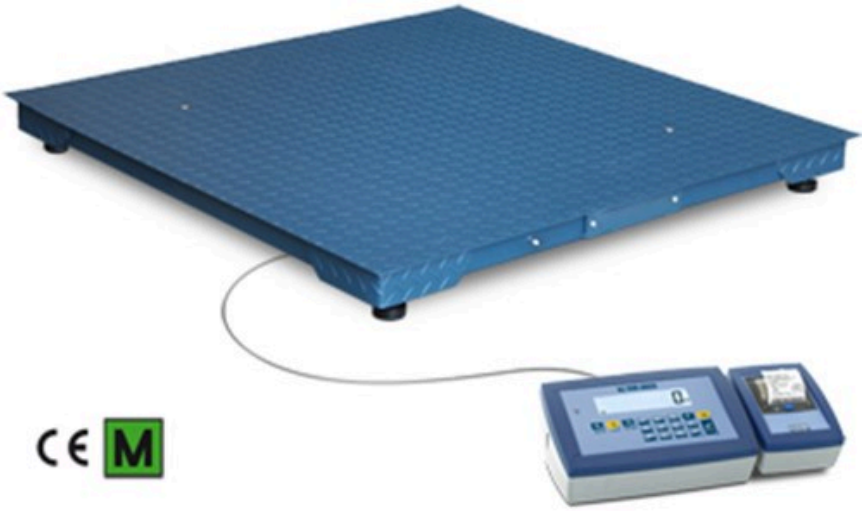

Standard Features

- Weight indicator with ABS case, 25mm backlit LCD display with 6 high contrast digits and icons for showing the active functions.
- 17-keys functional waterproof keypad.
- Thermic integrated printer, to print on standard or adhesive paper.
- Fitted with date and time.
- Functioning with 4 steel load cells, approved according to OIML R60 C3 standards, IP67 protection degree.
- Junction box with IP67 protection rating.
- Monobloc structure with oven-fire painted steel tubular, adjustable resting feet and level.
- Protection reinforcements close to the load cells.
- Fixed load surface in chequered steel. Size; see the table.
- Digital calibration and Set-Up from keypad or from PC through DINITOOLS.
- 3m long cable for the connection between platform and indicator.
- Power supply: 230Vac, or through fitted rechargeable internal battery. Operating time; 40h aproximately.
- Fitted with high resolution calibration for internal use, with 0.03% accuracy of the maximum capacity (activated as standard and disabled by menu).

Optional

- Stainless steel column

Floor multifunctional scales, precise and reliable , composed of weight indicator with numerical and functional keyboard, integrated printer and monobloc steel platform, solid and sturdy. Particularly suitable for industrial and commercial use, these scales allow to weigh and issue receipts with business name and 2 tracking numbers. CE-M APPROVED scales in dual range as standard, according to OIML R-76 / EN 45501 standards.

WEFLK: WALL-E Floor Scale Series with Integrated Printer Specifications

Selectable Features

- The user can select the operating modes directly using the dedicated key*:
  - High resolution display x 10
  - Precision weighing with temporary recalibration via a sample weight (for internal factory use)
  - Net/Gross
  - Lb to Kg converter
  - Free conversion factor (for meter and litre counters etc.)
  - Weight totalizer
  - Formulizer
  - +/- controller with quick target and threshold input
  - Percentage weighing
  - Percentage batching with programmable target
  - Piece counter
  - Hold
  - Alibi memory (optional)

Available Versions

Code	l x w x h (mm)	Nr. of cells	Max (kg)	M 2R (g)*
WEFLBK1500-1	1250x1250x120	4x1000kg	600/1500	0,2/0,5
WEFLDK3000-2	1250x1500x120	4x2000kg	1500/3000	0,5/1
WEFLEK3000-2	1500x1500x120	4x2000kg	1500/3000	0,5/1

(*) These divisions are obtainable only with the relative options.

Parts

Part #	Description
Available Versions	
WEFLBK1500-2	Floor scale 1250x1250x120mm, Max=600/1500kg, e=0,2/0,5kg. Fitted with ABS weight indicator with printer. Legal for trade as standard.
WEFLDK3000-2	Floor scale 1250x1500x120mm, Max=1500/3000kg, e=0,5/1kg. Fitted with ABS weight indicator with printer. Legal for trade as standard.
WEFLEK3000-2	Floor scale 1500x1500x120mm, Max=1500/3000kg, e=0,5/1kg. Fitted with ABS weight indicator with printer. Legal for trade as standard.

Options

Part #	Description
International Power Cables	
PWCORDAUS	Version with AU power cord.
PWCORDCH	Power supply cord with SEV1011 plug (CH plug).
PWCORDUK	Version with BS1363 power cord (UK plug).
PWCORDUS	Version with US type B power cord (Japan, North and Central America).
Frame for Flush Floor Installation	
FLBTF-1	Frame for flush floor installation, for FLB / WEFLB scales.
FLDTF-1	Frame for flush floor installation, for FLD / WEFLD scales.
FLETF-1	Frame for flush floor installation, for FLE / WEFLE scales.
Calibration Service (Only at Order)	
CT6	ISO 17025 calibration certificate from 301 to 1500 kg for single scale/platform. For precision and industrial scales, crane scales. The certificate is provided in digital format (pdf) and sent by e-mail.
CT7	ISO 17025 calibration certificate from 1501 to 3000 kg for single scale/platform. For precision balances, industrial and crane scales. The certificate is provided in digital format (pdf) and sent by e-mail.
Connection Cables	
RSCBRJ10M	RS232/C serial cable - DB9/RJ11 - l=10m.
RSCBUSB-1	USB PC/RS232 converter cable, l=1,5m. USB/RJ11 connector.
Other Options	
ECEMDOC	Printed EU declaration of conformity, EU certificate of verification, test certificate and metrological book (free download from our website, only for approved CE-M products). NET €.