
Weighing Kits for 2-Axle Vehicles and Vans

DINI ARGEO
Scales - Weighing systems

As of: Thursday, January 15, 2026

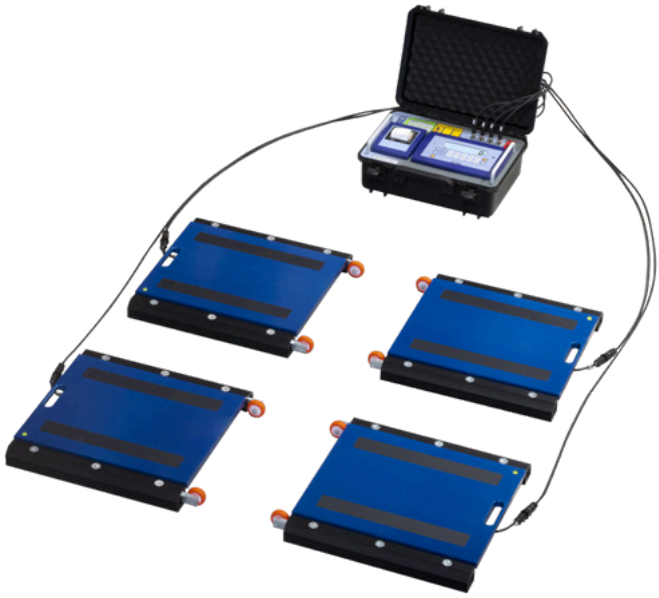

Standard Features

- The vehicle weighing kit is composed of 4 WWS weighing pads, a product patented by Dini Argeo. The loading surface is made of a special high-strength aluminum alloy, designed to be strong and light. The IP68 protection against water and dust ensures a long life of the platforms even in case of bad weather.
  Easy to move and position, thanks to the integrated wheels.
- Weight indicator with integrated printer and transport case to protect the weight indicator even in the rain. 10h of autonomy, thanks to the rechargeable battery.

Weighs the whole vehicle and calculates the weight of the axles. Composed of 4 WWS series portable pads and the weighing terminal with integrated printer. Cable version.

Portable Vehicle Scales

WWS is the most cost-effective solution patented by Dini Argeo for weighing a vehicle. Thanks to the low weight and ease of transport, in just a few minutes it is possible to create a weighing station for weighing 2-axle vehicles. Compared to a traditional weighbridge, it does not require masonry work that can permanently occupy part of the yard space and is easily transportable.

The vehicle weighing kit is ideal to:

- Weigh 2-axle vehicles and vans
- Check the weight of the material transported by the vehicle and carry out simple checks on incoming/outgoing goods.
- Weigh for limited periods of time (harvests, crops, etc.) without the need for excavations or masonry work.
- Check for any vehicle overloads, avoiding penalties.

Weighing Kits for 2-Axle Vehicles and Vans

Great Versatility of Use:
The vehicle weighing kit is ideal to:
Weigh 2-axle vehicles and vans
Check the weight of the material transported by the vehicle and carry out simple checks on incoming/outgoing goods.
Weigh for limited periods of time (harvests, crops, etc.) without the need for excavations or masonry work.
Check for any vehicle overloads, avoiding penalties.

Available Functions:
Complete weighing of a vehicle.
Weighing with insertion of the preset tare.
Printing of the weighs.

Approvals:
The system is CE approved according to Directive 2014/31/EU (NAWI).

Technologically Advanced:

The vehicle weighing kit is composed of 4 WWS weighing pads, a product patented by Dini Argeo.
The loading surface is made of a special high-streng aluminum alloy, designed to be strong and light.
The IP68 protection against water and dust ensures long life of the platforms even in case of bad weathe
Easy to move and position, thanks to the integrated wheels.
Weight indicator with integrated printer and transpor case to protect the weight indicator even in the rain.
10h of autonomy, thanks to the rechargeable battery

For further technical details, see the data sheet of th indicator DFWKR.
Also available in wireless radio version for greater convenience of use.

Available Versions

Code	l x w x h (mm)	Max (kg)	d (kg)	M (kg)	d HR (kg)*	Notes
WWSB600-2	400x300x58	600	0,2	0,2	--	Price for single platform
WWSB1500-2	400x300x58	1500	0,5	0,5	--	Price for single platform
WWSB3T-2	400x300x58	3000	1	1	0,1	Price for single platform
WWSB6T-2	400x300x58	6000	2	2	0,2	Price for single platform
WWSB8T-2	400x300x58	8000	5	5	0,5	Price for single platform
WWSC1.5T-2	500x400x58	1500	0,5	0,5	0,05	Price for single platform
WWSC3T-2	500x400x58	3000	1	1	0,1	Price for single platform
WWSC6T-2	500x400x58	6000	2	2	0,2	Price for single platform
WWSC10T-2	500x400x58	10000	5	5	0,5	Price for single platform
WWSC15T-2	500x400x58	15000 (12500**)	5	5	0,5	Price for single platform
WWSE6T-2	700x450x58	6000	2	2	0,2	Price for single platform
WWSE10T-2	700x450x58	10000	5	5	0,5	Price for single platform
WWSE15T-2	700x450x58	15000 (12500**)	5	5	0,5	Price for single platform
WWSD6T-2	900x500x58	6000	2	2	0,2	Price for single platform
WWSD10T-2	900x500x58	10000	5	5	0,5	Price for single platform
WWSD15T-2	900x500x58	15000	5	5	0,5	Price for single platform
WWSD20T-2	900x500x58	20000 (15000**)	10	10	1	Price for single platform

(*) These divisions are obtainable only with the relative options

(**) In combination with ECEM approval.

Parts

Part #	Description
Available Versions	
WWSB600-2	Wheel weighing platform with 600 kg maximum capacity, 0.2 kg division, loading surface 400x300 mm, height 58 mm.
WWSB1500-2	Wheel weighing platform with 1500 kg maximum capacity, 0,5 kg division, loading surface 400x300 mm, height 58 mm.
WWSB3T-2	Wheel weighing platform with 3000 kg maximum capacity, 1 kg division, loading surface 400x300 mm, height 58 mm.
WWSB6T-2	Wheel weighing platform with 6000 kg maximum capacity, 2 kg division, loading surface 400x300 mm, height 58 mm.
WWSB8T-2	Wheel weighing platform with 8000 kg maximum capacity, 5 kg division, loading surface 400x300 mm, height 58 mm.
WWSC1.5T-2	Wheel weighing platform with 1500 kg maximum capacity, 0,5 kg division, loading surface 500x400 mm, height 58 mm.
WWSC3T-2	Wheel weighing platform with 3000 kg maximum capacity, 1 kg division, loading surface 500x400 mm, height 58 mm.
WWSC6T-2	Wheel weighing platform with 6000 kg maximum capacity, 2 kg division, loading surface 500x400 mm, height 58 mm.
WWSC10T-2	Wheel weighing platform with 10000 kg maximum capacity, 5 kg division, loading surface 500x400 mm, height 58 mm.
WWSC15T-2	Wheel weighing platform with 15000 kg maximum capacity, 5 kg division, loading surface 500x400 mm, height 58 mm.
WWSE6T-2	Wheel weighing platform with 6000 kg maximum capacity, 2 kg division, loading surface 700x450 mm, height 58 mm.
WWSE10T-2	Wheel weighing platform with 10000 kg maximum capacity, 5 kg division, loading surface 700x450 mm, height 58 mm.
WWSE15T-2	Wheel weighing platform with 15000 kg maximum capacity, 5 kg division, loading surface 700x450 mm, height 58 mm.
WWSD6T-2	Wheel weighing platform with 6000 kg maximum capacity, 2 kg division, loading surface 900x500 mm, height 58 mm.
WWSD10T-2	Wheel weighing platform with 10000 kg maximum capacity, 5 kg division, loading surface 900x500 mm, height 58 mm.
WWSD15T-2	Wheel weighing platform with 15000 kg maximum capacity, 5 kg division, loading surface 900x500 mm, height 58 mm.
WWSD20T-2	Wheel weighing platform with 20000 kg maximum capacity, 10 kg division, loading surface 900x500 mm, height 58 mm.
Transportable weight indicators, with transport case	
DFWKRP-3	For analogue WWS (WWS...-y) only. Indicator with transport case and integrated printer. Fitted with specific programme for vehicle weighing, 17-key keypad, backlit display and time/dat Available only in combination with Dini Argeo vehicle weighing systems (WWS, RWS, DTW, WBSA series).

Options

Part #	Description
High Resolution (d HR) (only at time of order)	
EHR	High resolution model for internal factory use.
International Power Plugs	
AUS-V4	Version with AU charger.
UK-V4	Version with UK charger.
US-V4	Version with US charger.
Optional Power Supply Cords	
PWCORDAUSVDE	Version with AU power cord.
PWCORDUSVDE	Version with US type B power cord. (Japan, North and Central America).
PWCORDUKVDE	Version with BS1363 power cord (UK plug).
Legal for Trade Approval (only at time of order)	
ECEM	Single range 3000e legal for trade approval, for single platform/scale. NOTE: Depending on the product, the ECEM approval service may require DINICAL calibration service. Check see if DINICAL is in the product options.
ECEMTOT	EC type approval of total system capacity, for WWS multi-platform wheel weighing systems. Attention: ECEMTOT excludes the functionality of selecting the number of connected platforms.
{#On / off ramp}	
WWSCR	Single aluminium ramp for WWSC. Dimensions 500x150x30mm
WWSER	Single aluminium ramp for WWSE. Dimensions 700x150x30mm.
WWSDR	Single aluminium ramp for WWSD and WWSF. Dimensions 900x150x30mm.
Levelling Mats for Axle Weighing	
LMEK12-1	New "Easy Level" kit with improved rigidity, for WWSE. Consisting of 12 levelling modules and 4 ramps.
LMDK18-1	New "Easy Level" kit with improved rigidity, for WWSD. Consisting of 20 levelling modules and 4 ramps.
Frame for Flush Floor Installation	
WWSCTF	Frame for flush floor installation. For WWSC series pad.
WWSETF	Frame for flush floor installation. For WWSE series pad.
WWSDTF	Frame for flush floor installation. For WWSD pad.
WWSFTF	Frame for flush floor installation. For WWSF series pad.